

11/27/00  
JC945 U.S. PTO

11-28-00

A  
JC913 U.S. PTO  
09/22/74  
00/27/11

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of: David Erb et al.  
Title: LOSSLESS, CONTEXT-FREE COMPRESSION SYSTEM AND METHOD  
Attorney Docket No.: 777.386US1

PATENT APPLICATION TRANSMITTAL

BOX PATENT APPLICATION

Commissioner for Patents  
Washington, D.C. 20231

We are transmitting herewith the following attached items and information (as indicated with an "X"):


- X Return postcard.
- X Utility Patent Application under 37 CFR § 1.53(b) comprising:
  - X Specification ( 21 pgs, including claims numbered 1 through 27 and a 1 page Abstract).
  - X Formal Drawing(s) ( 3 sheets).
  - X Signed Combined Declaration and Power of Attorney ( 3 pgs).
  - X Check in the amount of \$1,076.00 to pay the filing fee.
- X Assignment of the invention to Microsoft Corporation ( 3 pgs) and Recordation Form Cover Sheet.
- X Check in the amount of \$40.00 to pay the Assignment recording fee.

The filing fee has been calculated below as follows:

	No. Filed	No. Extra	Rate	Fee
TOTAL CLAIMS	27 - 20 =	7	x 18 =	\$126.00
INDEPENDENT CLAIMS	6 - 3 =	3	x 80 =	\$240.00
] MULTIPLE DEPENDENT CLAIMS PRESENTED				\$0.00
BASIC FEE				\$710.00
TOTAL				\$1,076.00

Please charge any additional required fees or credit overpayment to Deposit Account No. 19-0743.

SCHWEGMAN, LUNDBERG, WOESSNER & KLUTH, P.A.  
P.O. Box 2938, Minneapolis, MN 55402 (612-373-6900)

By:   
Atty: Bradley A. Forrest  
Reg. No. 30,837

Customer Number 21186

"Express Mail" mailing label number: EL709305454US  
Date of Deposit: November 27, 2000

This paper or fee is being deposited on the date indicated above with the United States Postal Service pursuant to 37 CFR 1.10, and is addressed to the Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

# LOSSLESS, CONTEXT-FREE COMPRESSION SYSTEM AND METHOD

## Copyright Notice and Permission

A portion of the disclosure of this patent document may contain material that is  
5 subject to copyright protection. The copyright owner has no objection to the facsimile  
reproduction by anyone of the patent document or the patent disclosure as it appears in  
the Patent and Trademark Office patent files or records, but otherwise reserves all  
copyright rights whatsoever. The following notice shall apply to this document:  
Copyright © 2000, Microsoft Corp.

## Field of the Invention

The invention relates generally to data compression. More particularly, the  
invention relates to compression of data obtained by testing of computer program  
performance.

## Background

Computer programs have become increasingly complex as they provide more  
features. As complexity increases, the probability that a computer program will contain a  
programming error also increases dramatically. To reduce the probability of distributing  
20 a computer program with a programming error, software developers perform extensive  
testing.

Testing is also performed to measure and improve the performance of computer  
programs. Performance measurement involves monitoring the amount of time, *e.g.*,  
processor cycles, used by the individual functions that make up a program. This  
25 knowledge enables developers to focus their efforts on improving the performance of  
components that need the most improvement. Because of the importance of thorough  
testing and because such testing can be very time-consuming, software developers have  
developed extensive testing procedures.

Some testing procedures involve inserting functions known as probes at selected  
30 points in computer code, such as entry and exit points of functions. These probes collect  
information of interest to the software developer, such as time stamps, stack addresses,

and other counters and data records. This information allows developers to analyze and tune application performance.

Such profiling operations typically collect large amounts of data, particularly for long running and call intensive applications. As a result, data storage requirements and demands on processing resources are considerable. To address these issues, data compression techniques have been proposed to reduce data storage and processing needs. Most such techniques are dictionary-based and require a large amount of data to decompress selected data. For example, in certain techniques, to decompress a particular piece of information, it is necessary to decompress all of the information preceding the desired piece. As a result, real-time access to the compressed data is limited. In addition, many compression techniques are lossy and result in the loss of a certain amount of information. Compression also consumes computing resources and may have adverse effects on the accuracy of the profiling operation itself.

These limitations impede the usefulness of conventional data compression techniques in profiling operations, in which real-time access to data is important, and in which minimal interference with the profiling operation is desirable. Accordingly, a need continues to exist for a data compression scheme that adequately addresses these issues. For maximum usefulness in profiling, it is desirable that the data compression scheme have a minimal effect on the performance data itself. Further, the data compression scheme should be easily integrated into the logging engine that collects the profiling data, and should be easily enabled or disabled by the user.

### **Summary of the Invention**

Lossless, context-free data compression is implemented using a data aware compression scheme that is specific to the type of data being compressed. A modified delta compression scheme is used in which difference information is encoded with reference to a set of typical difference values that commonly occur for the type of data being compressed. Selecting the compression scheme based on the type of data being compressed allows highly-compressed, yet lossless, compression. In addition, the contextual information required to uncompress information is reduced or eliminated, thereby enabling random access of the compressed data.

One implementation is directed to a data compression method that includes determining difference information as a function of the data to be compressed. If the difference information satisfies a size constraint, it is encoded with reference to a set of commonly occurring difference values for a type of the data to be compressed.

5 In another implementation, the data is profiling data from which difference information is determined. If the profiling data is timestamp data, the difference information is encoded as a signed quantity with reference to a set of commonly occurring timestamp difference values. If, on the other hand, the profiling data is stack data, the difference information is encoded as an unsigned quantity with reference to a set of commonly occurring stack difference values. For stack data, the sign of the difference is implied by the type of profile sample being encoded.

Still other implementations include computer-readable media and apparatuses for performing the above-described methods. The above summary of the present invention is not intended to describe every implementation of the present invention. The figures and the detailed description that follow more particularly exemplify these implementations.

### **Brief Description of the Drawings**

- Figure 1 illustrates a simplified overview of an example embodiment of a computing environment for the present invention.
- 20 Figure 2 is a flowchart that illustrates an example method for performing data compression, according to a particular implementation of the present invention.
- Figure 3 is a flowchart that depicts an example method for performing data-aware data compression, according to another implementation of the present invention.

### **Detailed Description**

In the following detailed description of various embodiments, reference is made to the accompanying drawings that form a part hereof, and in which are shown by way of illustration specific embodiments in which the invention may be practiced. It is

understood that other embodiments may be utilized and structural changes may be made without departing from the scope of the present invention.

### Hardware and Operating Environment

5 Figure 1 illustrates a hardware and operating environment in conjunction with which embodiments of the invention may be practiced. The description of Figure 1 is intended to provide a brief, general description of suitable computer hardware and a suitable computing environment with which the invention may be implemented. Although not required, the invention is described in the general context of computer-executable instructions, such as program modules, being executed by a computer, such as  
10 a personal computer (PC). This is one embodiment of many different computer configurations, some including specialized hardware circuits to analyze performance, that may be used to implement the present invention. Generally, program modules include routines, programs, objects, components, data structures, etc. that perform particular tasks or implement particular abstract data types.  
15

Moreover, those skilled in the art will appreciate that the invention may be practiced with other computer-system configurations, including hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, network personal computers ("PCs"), minicomputers, mainframe computers, and the like.  
20 The invention may also be practiced in distributed computing environments where tasks are performed by remote processing devices linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

Figure 1 shows a computer arrangement implemented as a general-purpose  
25 computing or information-handling system 80. This embodiment includes a general purpose computing device such as personal computer (PC) 120, that includes processing unit 121, a system memory 122, and a system bus 123 that operatively couples the system memory 122 and other system components to processing unit 121. There may be only one or there may be more than one processing unit 121, such that the processor computer  
30 120 comprises a single central-processing unit (CPU), or a plurality of processing units, commonly referred to as a parallel processing environment. The computer 120 may be a

conventional computer, a distributed computer, or any other type of computer; the invention is not so limited.

In other embodiments other configurations are used in the personal computer 120. System bus 123 may be any of several types, including a memory bus or memory controller, a peripheral bus, and a local bus, and may use any of a variety of bus architectures. The system memory 122 may also be referred to as simply the memory, and it includes read-only memory (ROM) 124 and random-access memory (RAM) 125. A basic input/output system (BIOS) 126, stored in ROM 124, contains the basic routines that transfer information between components of personal computer 120. BIOS 126 also contains start-up routines for the system.

The personal computer 120 typically includes at least some form of computer-readable media. Computer-readable media can be any available media that can be accessed by the personal computer 120. By way of example, and not limitation, computer readable media may comprise computer storage media and communication media. Computer storage media includes volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage information such as computer readable instructions, data structures, program modules, or other data. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium that can be used to store the desired information and that can be accessed by the personal computer 120. Communication media typically embodies computer readable instructions, data structures, program modules, or other data in a modulated data signal such as a carrier wave or other transport mechanism and includes any information delivery media. The term “modulated data signal” means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared, and other wireless media. Combinations of any of the above are also included in the scope of computer readable media.

By way of example, the particular system depicted in Figure 1 further includes a hard disk drive 127 having one or more magnetic hard disks (not shown) onto which data is stored and retrieved for reading from and writing to hard-disk-drive interface 132, magnetic disk drive 128 for reading from and writing to a removable magnetic disk 129, and optical disk drive 130 for reading from and/or writing to a removable optical disk 131 such as a CD-ROM, DVD or other optical medium. The hard disk drive 127, magnetic disk drive 128, and optical disk drive 130 are connected to system bus 123 by a hard-disk drive interface 132, a magnetic-disk drive interface 133, and an optical-drive interface 134, respectively. The drives 127, 128, and 130 and their associated computer-readable media 129, 131 provide nonvolatile storage of computer-readable instructions, data structures, program modules and other data for personal computer 120.

In various embodiments, program modules are stored on the hard disk drive 127, magnetic disk 129, optical disk 131, ROM 124 and/or RAM 125 and may be moved among these devices, *e.g.*, from hard disk drive 127 to RAM 125. Program modules include operating system 135, one or more application programs 136, other program modules 137, and/or program data 138. A user may enter commands and information into personal computer 120 through input devices such as a keyboard 140 and a pointing device 42. Other input devices (not shown) for various embodiments include one or more devices selected from a microphone, joystick, game pad, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit 121 through a serial-port interface 146 coupled to system bus 123, but in other embodiments they are connected through other interfaces not shown in Figure 1, such as a parallel port, a game port, or a universal serial bus (USB) interface. A monitor 147 or other display device also connects to system bus 123 via an interface such as a video adapter 148. In some embodiments, one or more speakers 157 or other audio output transducers are driven by sound adapter 156 connected to system bus 123. In some embodiments, in addition to the monitor 147, system 80 includes other peripheral output devices (not shown) such as a printer or the like.

In some embodiments, the personal computer 120 operates in a networked environment using logical connections to one or more remote computers such as remote computer 149. Remote computer 149 may be another personal computer, a server, a

router, a network PC, a peer device, or other common network node. Remote computer 149 typically includes many or all of the components described above in connection with personal computer 120; however, only a storage device 150 is illustrated in Figure 1. The logical connections depicted in Figure 1 include local-area network (LAN) 151 and a  
5 wide-area network (WAN) 152, both of which are shown connecting the personal computer 120 to remote computer 149; typical embodiments would only include one or the other. Such networking environments are commonplace in offices, enterprise-wide computer networks, Intranets and the Internet.

When placed in a LAN networking environment, the personal computer 120  
10 connects to local network 151 through a network interface or adapter 153. When used in a WAN networking environment such as the Internet, the personal computer 120 typically includes modem 154 or other means for establishing communications over network 152. Modem 154 may be internal or external to the personal computer 120 and connects to system bus 123 via serial-port interface 146 in the embodiment shown. In a  
15 networked environment, program modules depicted as residing within the personal computer 120 or portions thereof may be stored in remote-storage device 150. Of course, the network connections shown are illustrative, and other means of establishing a communications link between the computers may be substituted.

Software may be designed using many different methods, including object-  
20 oriented programming methods. C++ and Java are two examples of common object-oriented computer programming languages that provide functionality associated with object-oriented programming. Object-oriented programming methods provide a means to encapsulate data members (variables) and member functions (methods) that operate on that data into a single entity called a class. Object-oriented programming methods also  
25 provide a means to create new classes based on existing classes.

An object is an instance of a class. The data members of an object are attributes that are stored inside the computer memory, and the methods are executable computer code that act upon this data, along with potentially providing other services. The notion of an object is exploited in the present invention in that certain aspects of the invention  
30 are implemented as objects in some embodiments.



An interface is a group of related functions that are organized into a named unit. Some identifier may uniquely identify each interface. Interfaces have no instantiation; that is, an interface is a definition only without the executable code needed to implement the methods that are specified by the interface. An object may support an interface by providing executable code for the methods specified by the interface. The executable code supplied by the object must comply with the definitions specified by the interface. The object may also provide additional methods. Those skilled in the art will recognize that interfaces are not limited to use in or by an object-oriented programming environment.

#### Example Embodiments

A data aware compression scheme that is specific to the type of data being compressed is used to achieve lossless, context-free data compression. In particular, a modified delta compression scheme is used in which difference information is encoded with reference to a set of typical difference values that commonly occur for the type of data being compressed. In order to facilitate random access to the data, a local context is used in the data compression scheme.

Profiling data is accumulated in a buffer and is periodically written to a profiling data file. Profiling data typically consists of a series of records, each containing a record identifier, a counter value (frequently a timestamp, but possibly any other counter value of interest), a stack address, and a program code address. Specifically, at the start of each buffer run, the absolute values of the counters are recorded. Later, successive differences in counter values are recorded when their encodings fit in a short word. As a result, less data needs to be recorded as compared with conventional techniques. Reduced time in writing the data to the profiling data file is also achieved. Smaller profiling data files are easier to store, read, move, and copy.

Furthermore, because less input/output (I/O) bandwidth is used, the collected performance data is a more accurate indicator of actual application performance. In a particular embodiment of the present invention, the user can specify the desired level of compression, taking into account tradeoffs between increased resource usage and decreased profiling data file size. For example, for minimum processor overhead, if file

size and I/O bandwidth are not important considerations, the user can disable compression entirely.

In a particular embodiment of the present invention, compression is performed on a buffer-by-buffer basis. Performing compression in this manner allows the data compression scheme to be incorporated easily into the logging and analysis engines. To incorporate the data compression scheme into these or other components, one merely needs to locate a choke-point through which all buffers pass and insert a call to the compression or decompression utility function. To further facilitate integration and avoid the need for extra memory, compression occurs in place. Decompression can occur either in place or using a lookaside buffer.

Referring again to the drawings, Figure 2 depicts an example method 200 for performing data compression, according to a particular embodiment of the present invention. First, profiling data is collected using, for example, conventional function entry and exit probes that are well-known in the art. The data is collected into a buffer and is periodically transferred to the logger for storage in the profiling data file.

As depicted at a block 202, at the beginning of each buffer run, the absolute values of the counters are recorded. Profiling data is then collected by probes at a block 204 and accumulated to the buffer at a block 208. Before the data is written to the file, however, it is compressed at a block 206. The compression scheme is data-aware and compresses the data in a way that depends on the type of data being compressed. An example compression scheme is described in further detail below in connection with Figure 3.

As the buffer accumulates data, the system determines whether the buffer is full, as shown at a decision block 210. If the buffer is not full, flow returns to block 204, at which additional profiling data is collected. When the buffer becomes full, the data is transferred to the logger at a block 212 for writing to the profiling data file. The compressed buffer data is then written to the profiling data file at a block 214. The buffer having been flushed, execution then returns to block 204, and additional profiling data is accumulated to the buffer.

In an alternative embodiment of the present invention, compression is performed as the profiling data is written to the profiling data file at an optional block 216. The size

of the profiling data file is thus decreased, at the expense of an increased effect on the profiling process itself. The dashed lines in Figure 2 indicate that this compression is entirely optional and may be enabled or disabled at the user's option.

Compression of a buffer is performed outside of the profiled process, thereby  
5 avoiding attributing the time spent compressing the data to the profiled application. By compressing the blocks in the buffer writer as they are being prepared for writing to the buffer, all compression is performed in a profile monitor process, minimizing the effect of the compression process on the profiling process. In addition, compression is performed at intervals that are spaced out substantially evenly. As a result, the latency of  
10 the compression process is amortized over the intervals between storage of buffers to the profiling data file.

Because compression is performed after the profiling data is written to the buffer, the function entry and exit probes, as well as any other collection probes that are used, are not compression aware. As a result, the same probes can be used regardless of whether  
15 compression is enabled, and regardless of the type of compression algorithm being used. This helps reduce the testing burden and allows compression to be unit-tested on any buffer, whether the buffer is generated during collection, copied from a pre-existing profiling data file, or generated by the profiling data file writing test utility. Similarly, the analysis engine can analyze compressed files using exactly the same algorithms and  
20 data formats as uncompressed files.

Figure 3 depicts an example method 300 for performing data-aware data compression, according to another embodiment of the present invention. This scheme uses a combination of delta compression and common-value coding techniques to improve compression ratios while maintaining a local context. Further, multiple values  
25 can be compressed into a single record for further conservation of space. Moreover, the probe code remains as short and fast as possible, minimizing side effects on the performance of the profiled application due to effects such as memory cache modification.

In this embodiment of the present invention, uncompressed data records contain a  
30 four-byte header indicating the record type, flags, and length, an eight-byte counter value, a four-byte stack value, and a four-byte program address, for a total of twenty bytes. The

compression scheme uses a delta bit in the type field to indicate whether the stack values and counter values are absolute values or successive delta (difference) values. The maximum delta value for a counter is two bytes, and the maximum delta value for the stack value is one byte. The record header is reduced from four bytes to one, while the program address is always recorded without modification. Thus, the number of bytes used for each record is reduced from twenty to eight. Moreover, the four-byte alignment constraint required for data buffers is thereby maintained.

The delta bit in the type field can be either set or unset. A set delta bit indicates that the stack delta value from the previous value fits within eight bits, and the counter delta value from the previous value fits within sixteen bits, and delta values are recorded in the probe data. On the other hand, an unset delta bit indicates that absolute values for both stack and counter values were recorded because one or both of the delta values did not fit. In this case, stack values occupy four bytes and counter values occupy eight bytes, as in the conventional format. This feature provides backwards compatibility so that the decompression scheme can read older profiling data files without difficulty.

First, at a block 302, data is collected as a function is entered or exited, or at another designated instrumentation point. The data is represented as records containing timestamp or other counter information and information regarding the stack context, *i.e.*, the calling context and the location within the program at which the data was collected. According to this embodiment of the present invention, these records are compressed using an algorithm selected as a function of the type of data being compressed. That is, timestamp or other counter information is compressed in one way, while stack context information is compressed in a different way. Flags are compressed in still another way, by recording them implicitly as part of the one-byte record type.

In one conventional record format, for function entries and function exits, four bytes are reserved for recording absolute stack addresses and eight bytes are reserved for recording time stamps. Four bytes are reserved for a record header, and four bytes are reserved for a memory address within the profiled application. Accordingly, the minimum size needed for a data record is twenty bytes.

In the conventional format, the function entry and exit probes fill up a data buffer with successive entry and exit data records. In a particular embodiment of the present

invention, the first sample collected in the buffer at block 302 always contains an absolute sample, while later samples may contain delta values. In this implementation, the probes do not incur additional computational overhead for calculating the delta values. Rather, they deliver absolute values into the buffers as in the conventional  
5 implementation. When a buffer becomes full, its contents are transferred to a logger for writing to the profiling data file.

After the first sample is collected in the buffer, a subsequent sample is collected at a block 304. A delta value is computed from the subsequent sample at a block 306. This delta value represents the difference either in counter value or in stack context from the  
10 previous sample.

At a decision block 308, the counter delta value is then analyzed to determine whether it will fit within two bytes, the maximum delta value for a particular counter. If not, the sample is recorded as an absolute value rather than a delta value at a block 310, and the delta bit is unset at a block 312 to indicate that the sample was recorded as an  
15 absolute value. As an alternative, further analysis can be performed to determine whether the delta value would fit in a larger block; if so, a different encoding scheme may be used to store the delta value. If the system determines that the delta value will fit within two bytes, the sample is recorded as an encoded delta value at a block 314, and the delta bit is set at a block 316.

Next, at a decision block 318, the stack delta value is then analyzed to determine whether it will fit within one byte, the maximum delta value for stack data. If not, the sample is recorded as an absolute value rather than a delta value at a block 320, and the delta bit is unset at a block 322 to indicate that the sample was recorded as an absolute  
20 value. As an alternative, further analysis can be performed to determine whether the delta value would fit in a larger block; if so, a different encoding scheme may be used to store the delta value. If the system determines that the delta value will fit within one  
25 byte, the sample is recorded as an encoded delta value at a block 324 and the delta bit is set at a block 326.

Next, at a decision block 328, it is determined whether the buffer is full. If not,  
30 execution then returns to block 304, at which another subsequent sample is collected. If the buffer is full, its contents are transferred to the logger at a block 330, after which

execution returns to block 302, at which the first sample in the now empty buffer is collected.

The type of encoding scheme used depends on the type of delta value being encoded. For example, because the timestamp values monotonically increase, the delta values are stored as unsigned quantities. By contrast, stack addresses always change in one direction on entering a function, and change in the opposite direction on exiting the function. Therefore, stack delta values are stored as unsigned quantities representing a number with one sign on function entry records and a number with the opposite sign on function exit records.

To improve compression further, the delta value is encoded before it is stored. In a particular embodiment, the delta value is encoded with reference to a set of 256 typical delta values for the particular type of delta value. This aspect of the compression scheme is dependent on the type of delta value in that, for example, timestamp delta values are encoded with reference to a different set of typical delta values than is used in encoding stack address delta values. This common value encoding technique can be used to represent the vast majority of delta values. The remaining delta values, *i.e.*, those other than the 256 typical delta values, are simply stored as 16-bit delta values. Any associated flags are also compressed using a common value encoding technique.

Other known properties of the behavior of timestamp and stack delta values are used in the encoding process. For example, when a function is entered, it is known that the stack value will change in some direction (either positive or negative) by a multiple of four. Similarly, when the function is exited, the stack value will change in the opposite direction by a multiple of four. Thus, savings can be realized by dividing the absolute value of the stack delta value by four before encoding it. It should be noted that, because the sign of the delta value (positive or negative) is implicit in whether the function is being entered or exited, the sign need not be encoded.

Further efficiencies can be realized in certain circumstances. For example, many function entry and function exit probes are used to instrument entry into and exit from the same function. Conventionally, timestamp and stack context information is recorded for both probes. According to a particular embodiment of the present invention, however, improved compression efficiency is realized by recording a single delta value for the

stack context information, since the stack context information remains unchanged between entry into and exit from the function. Similarly, if the timestamp delta value on function entry and the timestamp delta value on function exit can each be encoded into a single byte, improved compression efficiency is realized by recording a single record containing one byte of header information, one byte of stack data, two bytes of timestamp data, and four bytes of program address to represent the function entry and exit records, replacing forty uncompressed bytes with only eight compressed bytes.

While the embodiments of the invention have been described with specific focus on their embodiment in a software implementation, the invention as described above is not limited to software embodiments. For example, the invention may be implemented in whole or in part in hardware, firmware, software, or any combination thereof. The software of the invention may be embodied in various forms, such as a computer program encoded in a machine-readable medium, such as a CD-ROM, magnetic medium, ROM or RAM, or in an electronic signal. Further, as used in the claims herein, the term “module” shall mean any hardware or software component, or any combination thereof.

**What is claimed is:**

1. A computer-implemented method for compressing data, the method comprising:

5 determining difference information as a function of the data to be compressed;  
and

responding to the difference information satisfying a size constraint by encoding the difference information with reference to a set of commonly occurring difference values for a type of the data to be compressed.

10 2. The method of claim 1, further comprising, before determining the difference information, storing an initial counter value for the data to be compressed.

15 3. The method of claim 1, further comprising:  
accumulating the encoded difference information in a buffer; and  
storing the contents of the buffer in a profiling data file in response to the buffer accumulating a predetermined amount of difference information.

20 4. The method of claim 3, further comprising, before storing the contents of the buffer in the profiling data file, compressing the contents of the buffer.

25 5. The method of claim 1, further comprising, if the difference information is timestamp difference information, encoding the difference information as an unsigned quantity with reference to a set of commonly occurring timestamp difference values.

6. The method of claim 1, further comprising, if the difference information is stack difference information,

encoding the difference information as an unsigned quantity with reference to a set of commonly occurring stack difference values, and

30 reconstructing a sign of the stack difference from a context of one of function entry and function exit.



7. The method of claim 1, further comprising, if the difference information is stack difference information, dividing a quantity represented by the difference information by four before encoding the difference information.

5

8. The method of claim 1, further comprising, if the data to be compressed represents stack information collected upon entry to and exit from a function, recording a single difference value for the stack information.

10 9. A computer-implemented method for compressing profiling data, the method comprising:  
collecting the profiling data;  
determining difference information as a function of the collected profiling data;  
if the profiling data is timestamp data, encoding the difference information as an  
15 unsigned quantity with reference to a set of commonly occurring timestamp difference values; and  
if the profiling data is stack data,  
encoding the difference information as an unsigned quantity with  
reference to a set of commonly occurring stack difference values, and  
20 reconstructing a sign of the stack difference from a context of one of function entry and function exit.

10. A computer-readable medium having stored thereon computer-executable modules comprising:

25 at least one probe, configured to collect profiling data during execution of an application; and  
a buffer, configured to  
determine difference information as a function of the profiling data, and  
respond to the difference information satisfying a size constraint by  
30 encoding the difference information with reference to a set of commonly occurring difference values for a type of the profiling data.

11. The computer-readable medium of claim 10, wherein the buffer is further configured to, before determining the difference information, store an initial counter value for the data to be compressed.

5

12. The computer-readable medium of claim 10, wherein the buffer is further configured to accumulate the encoded difference information, and wherein the computer-executable modules further comprise a logger, configured to receive and store the contents of the buffer in a profiling data file in response to the buffer accumulating a predetermined amount of difference information.

10

13. The computer-readable medium of claim 12, wherein the buffer is further configured to, in response to accumulating the predetermined amount of difference information, compress the contents of the buffer and transfer the compressed contents to the logger.

15

14. The computer-readable medium of claim 10, wherein the buffer is further configured to, if the difference information is timestamp difference information, encode the difference information as an unsigned quantity with reference to a set of commonly occurring timestamp difference values.

20

15. The computer-readable medium of claim 10, wherein the buffer is further configured to, if the difference information is stack difference information, encode the difference information as an unsigned quantity with reference to a set of commonly occurring stack difference values, and reconstruct a sign of the stack difference from a context of one of function entry and function exit.

25

16. The computer-readable medium of claim 10, wherein the buffer is further configured to, if the difference information is stack difference information, divide a

30

quantity represented by the difference information by four before encoding the difference information.

17. The computer-readable medium of claim 10, wherein the buffer is further  
5 configured to, if the data to be compressed represents stack information collected upon entry to and exit from a function, record a single difference value for the stack information.

18. A computer-readable medium having stored thereon computer-executable  
10 modules comprising:

at least one probe, configured to collect profiling data during execution of an application; and

a buffer, configured to

determine difference information as a function of the collected profiling  
15 data,

if the profiling data is timestamp data, encode the difference information as an unsigned quantity with reference to a set of commonly occurring timestamp difference values, and

if the profiling data is stack data,

20 encode the difference information as an unsigned quantity with reference to a set of commonly occurring stack difference values, and

reconstruct a sign of the stack difference from a context of one of function entry and function exit.

19. A computer arrangement comprising:

25 at least one probe, configured to collect profiling data during execution of an application; and

a buffer, configured to

determine difference information as a function of the profiling data, and

respond to the difference information satisfying a size constraint by encoding the difference information with reference to a set of commonly occurring difference values for a type of the profiling data.

5           20.    The computer arrangement of claim 19, wherein the buffer is further configured to, before determining the difference information, store an initial counter value for the data to be compressed.

10           21.    The computer arrangement of claim 19, wherein the buffer is further configured to accumulate the encoded difference information, and wherein the computer-executable modules further comprise a logger, configured to receive and store the contents of the buffer in a profiling data file in response to the buffer accumulating a predetermined amount of difference information.

15           22.    The computer arrangement of claim 21, wherein the buffer is further configured to, in response to accumulating the predetermined amount of difference information, compress the contents of the buffer and transfer the compressed contents to the logger.

20           23.    The computer arrangement of claim 19, wherein the buffer is further configured to, if the difference information is timestamp difference information, encode the difference information as an unsigned quantity with reference to a set of commonly occurring timestamp difference values.

25           24.    The computer arrangement of claim 19, wherein the buffer is further configured to, if the difference information is stack difference information, encode the difference information as an unsigned quantity with reference to a set of commonly occurring stack difference values, and

30                reconstruct a sign of the stack difference from a context of one of function entry and function exit

25. The computer arrangement of claim 19, wherein the buffer is further configured to, if the difference information is stack difference information, divide a quantity represented by the difference information by four before encoding the difference information.

5

26. The computer arrangement of claim 19, wherein the buffer is further configured to, if the data to be compressed represents stack information collected upon entry to and exit from a function, record a single difference value for the stack information.

10

27. A computer arrangement comprising:  
at least one probe, configured to collect profiling data during execution of an application; and  
a buffer, configured to  
determine difference information as a function of the collected profiling data,  
if the profiling data is timestamp data, encode the difference information as an unsigned quantity with reference to a set of commonly occurring timestamp difference values, and  
if the profiling data is stack data,  
encode the difference information as an unsigned quantity with reference to a set of commonly occurring stack difference values, and  
reconstruct a sign of the stack difference from a context of one of function entry and function exit.

25

### **ABSTRACT OF THE DISCLOSURE**

Lossless, context-free data compression is implemented using a data aware compression scheme that is specific to the type of data being compressed. A modified delta compression scheme is used in which difference information is encoded with reference to a set of typical difference values that commonly occur for the type of data being compressed. Selecting the compression scheme based on the type of data being compressed allows highly-compressed, yet lossless, compression. In addition, the contextual information required to uncompress information is reduced or eliminated, thereby enabling random access of the compressed data.

"Express Mail" mailing label number: EL709305454US

Date of Deposit: November 27, 2000

This paper or fee is being deposited on the date indicated above with the United States Postal Service pursuant to 37 CFR 1.10, and is addressed to the Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

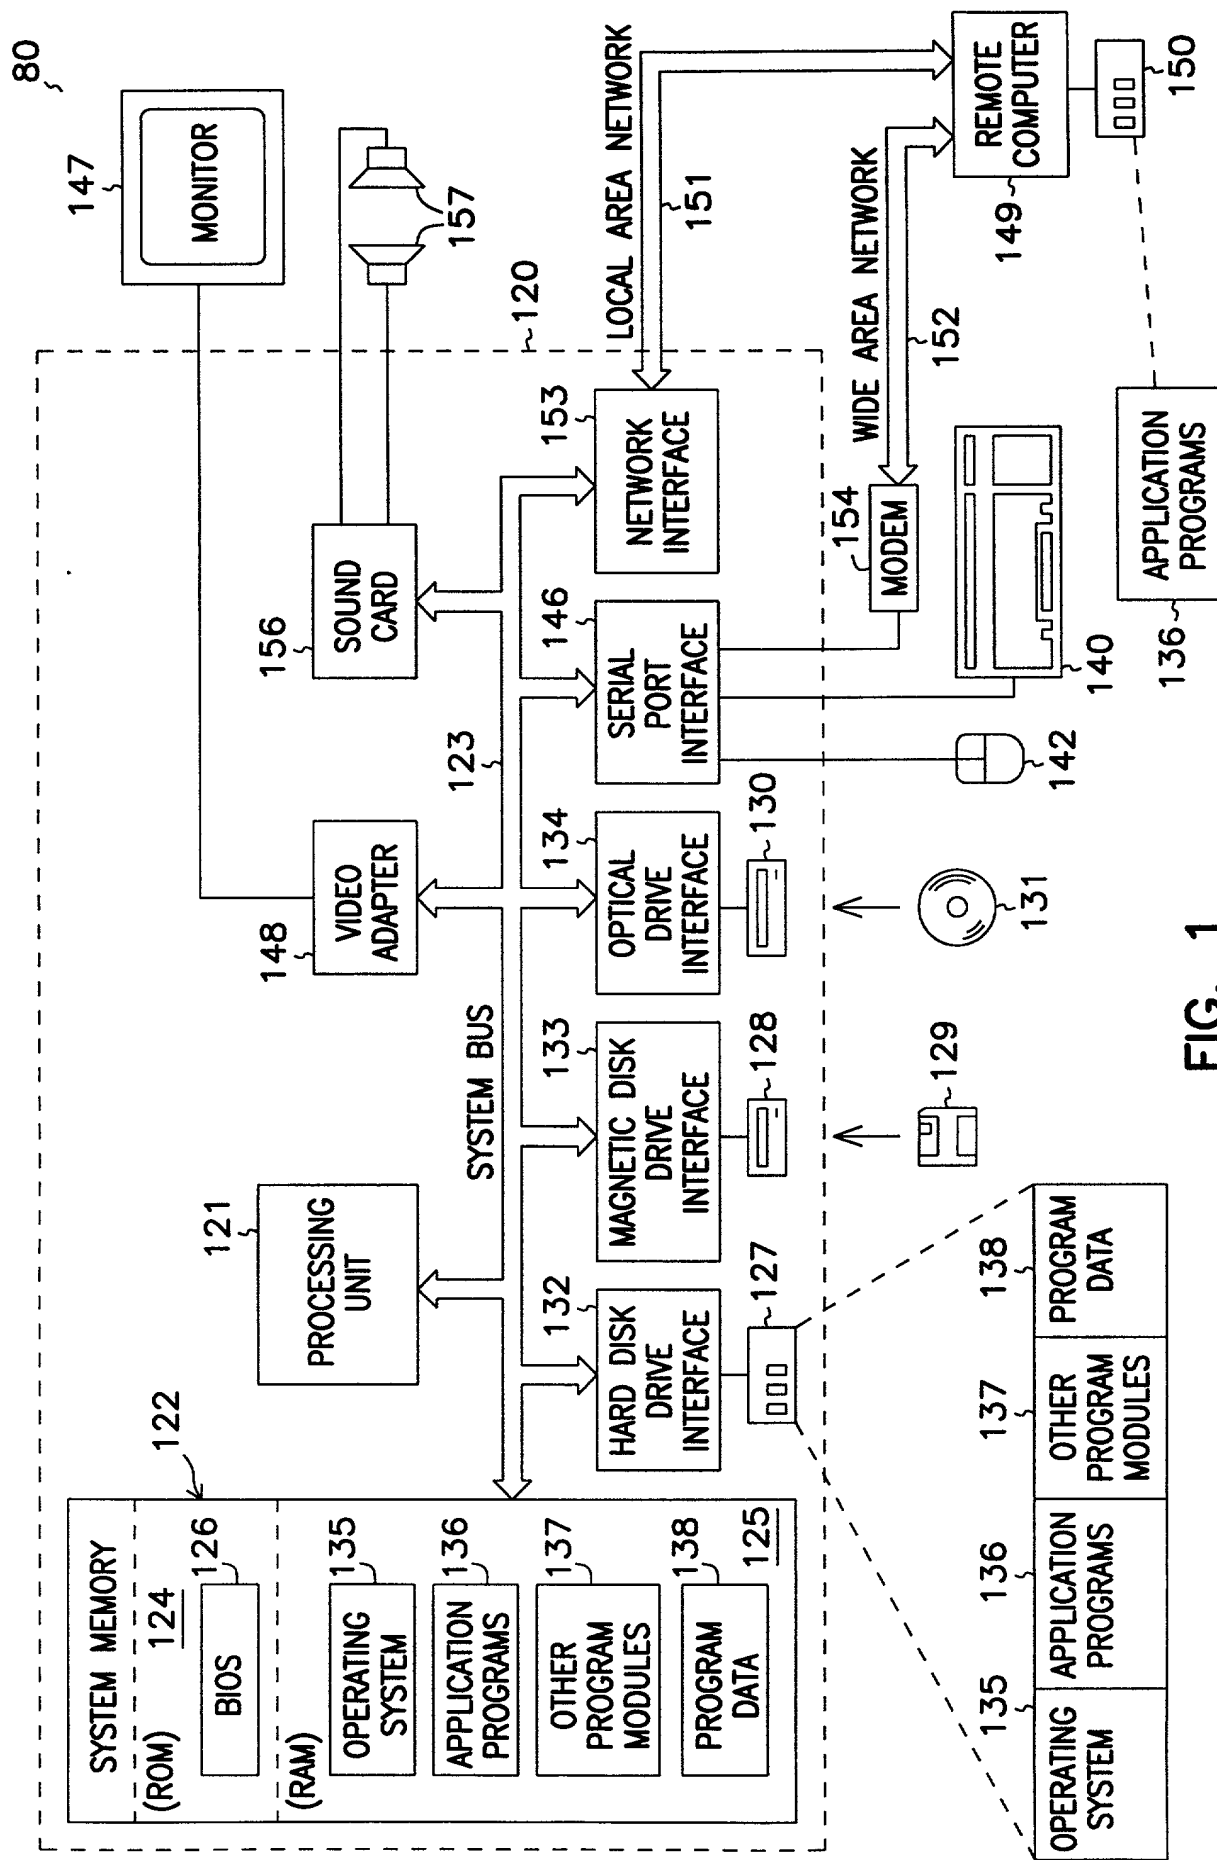


FIG. 1

record absolute  
values of counters

collect pro  
data

compress data

accumulate data to  
buffer

buffer full

Yes

```
transfer buffer data
to logger
```

compress data

write data to file

- 200

- 202

- 204

- 206

208

No

210


— 212

— 216

214

**FIG. 2**



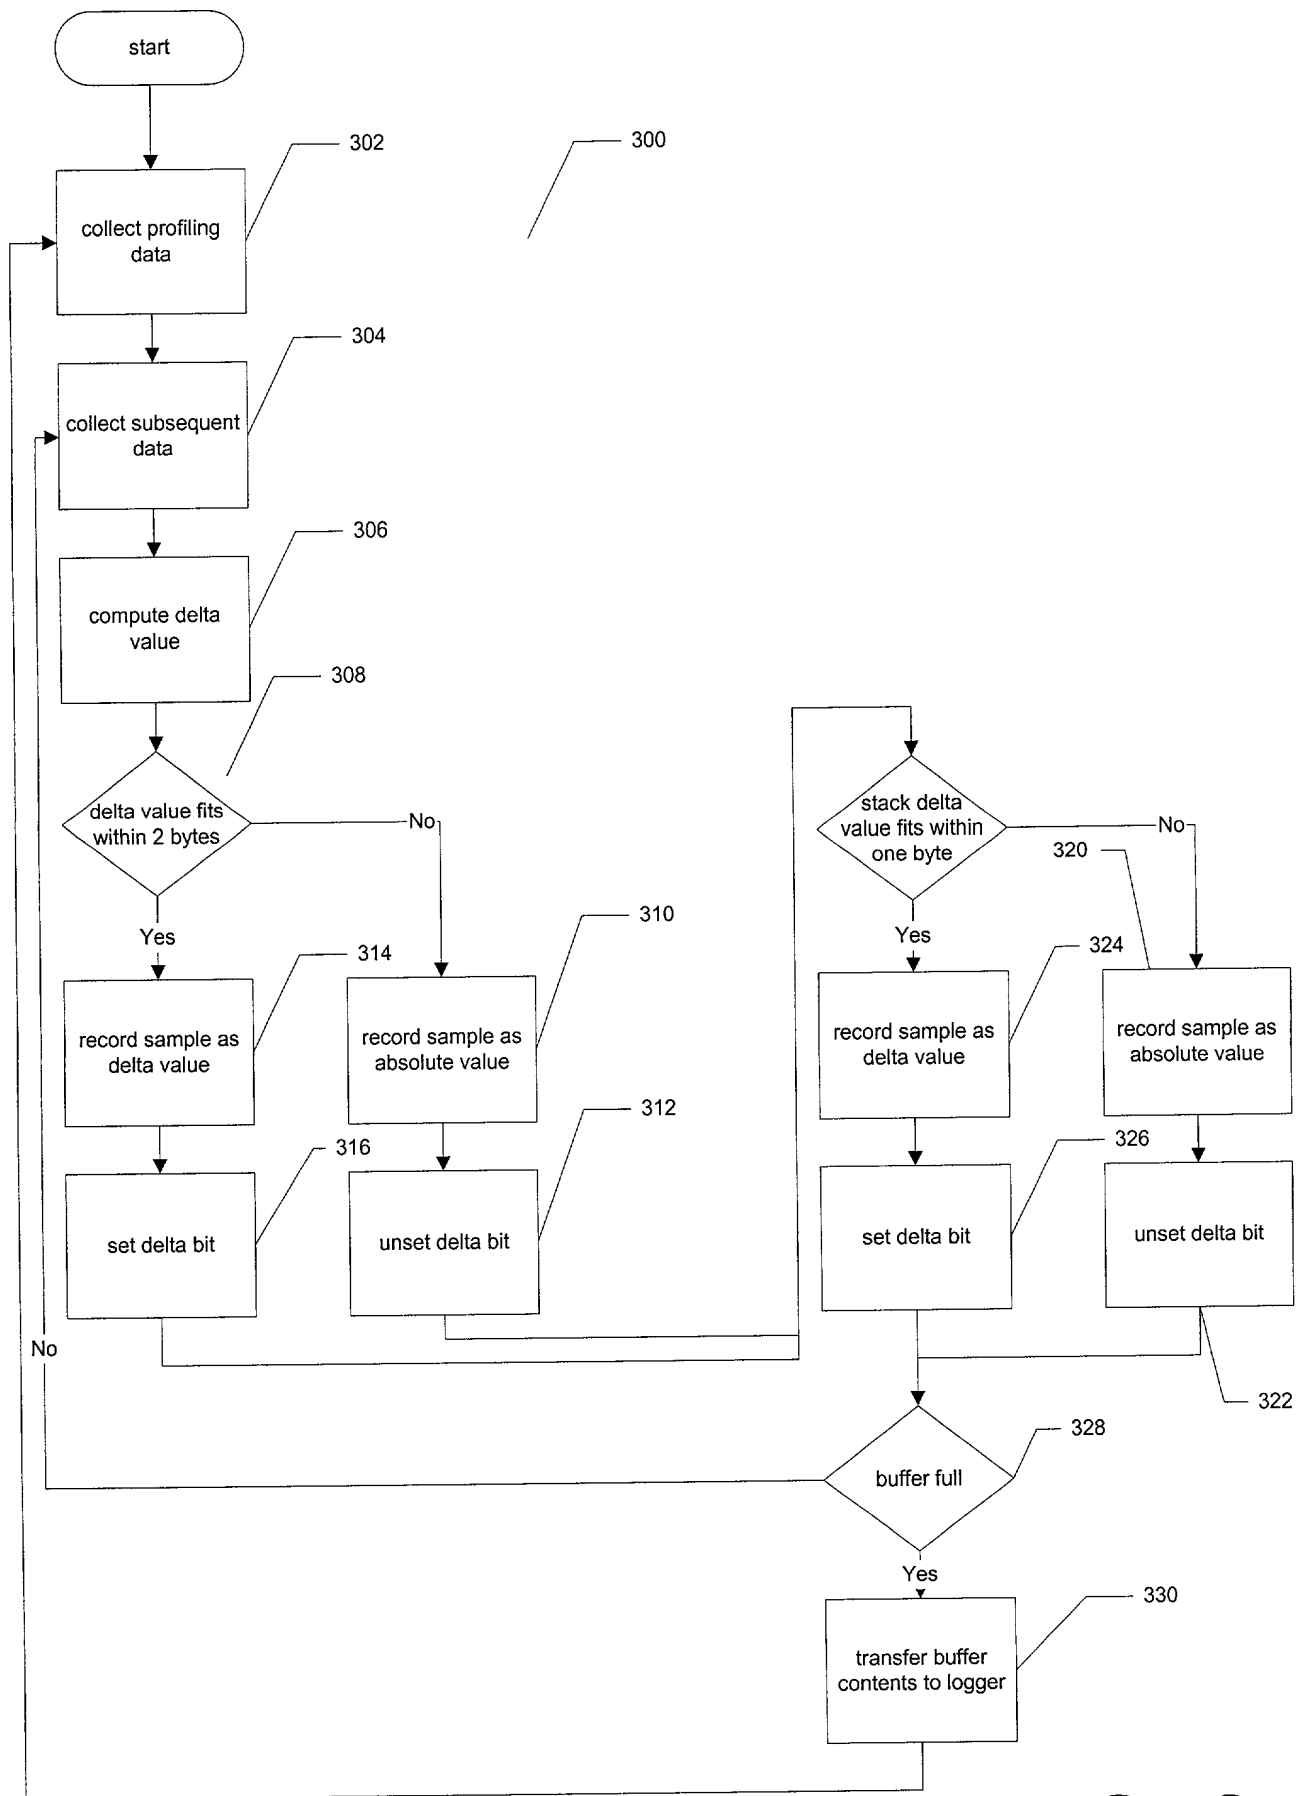

**FIG. 3**

SCHWEGMAN LUNDBERG WOESSNER KLUTH  
**United States Patent Application**  
**COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below named inventor I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: **LOSSLESS, CONTEXT-FREE COMPRESSION SYSTEM AND METHOD.**

The specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with 37 C.F.R. § 1.56 (attached hereto). I also acknowledge my duty to disclose all information known to be material to patentability which became available between a filing date of a prior application and the national or PCT international filing date in the event this is a Continuation-In-Part application in accordance with 37 C.F.R. § 1.63(e).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on the basis of which priority is claimed:

**No such claim for priority is being made at this time.**

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

**No such claim for priority is being made at this time.**

I hereby claim the benefit under 35 U.S.C. § 120 or 365(c) of any United States and PCT international application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. § 1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

**No such claim for priority is being made at this time.**

I hereby appoint the following attorney(s) and/or patent agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Anglin, J. Michael Reg. No. 24,916  
Beekman, Marvin L. Reg. No. 38,377  
Bianchi, Timothy E. Reg. No. 39,610  
Billion, Richard E. Reg. No. 32,836  
Black, David W. Reg. No. 42,331  
Brennan, Leoniede M. Reg. No. 35,832  
Brennan, Thomas F. Reg. No. 35,075  
Brooks, Edward J., III Reg. No. 40,925  
Chu, Dinh C.P. Reg. No. 41,676  
Clark, Barbara J. Reg. No. 38,107  
Clise, Timothy B. Reg. No. 40,957  
Crouse, Daniel D. Reg. No. 32,022  
Dahl, John M. Reg. No. 44,639  
Drake, Eduardo E. Reg. No. 40,594  
Embretson, Janet E. Reg. No. 39,665  
Fordenbacher, Paul J. Reg. No. 42,546  
Forrest, Bradley A. Reg. No. 30,837  
Gamon, Owen J. Reg. No. 36,143  
Harris, Robert J. Reg. No. 37,346


Hill, Stanley K. Reg. No. 37,548  
Huebsch, Joseph C. Reg. No. 42,673  
Jurkovich, Patti J. Reg. No. 44,813  
Kalis, Janal M. Reg. No. 37,650  
Kaufmann, John D. Reg. No. 24,017  
Klima-Silberg, Catherine I. Reg. No. 40,052  
Kluth, Daniel J. Reg. No. 32,146  
Lacy, Rodney L. Reg. No. 41,136  
Lemaire, Charles A. Reg. No. 36,198  
LeMoine, Dana B. Reg. No. 40,062  
Lundberg, Steven W. Reg. No. 30,568  
Maeyaert, Paul L. Reg. No. 40,076  
Maki, Peter C. Reg. No. 42,832  
Malen, Peter L. Reg. No. 44,894  
Mates, Robert E. Reg. No. 35,271  
McCrackin, Ann M. Reg. No. 42,858  
Moore, Charles L., Jr. Reg. No. 33,742  
Nama, Kash Reg. No. 44,255  
Nelson, Albin J. Reg. No. 28,650

Nielsen, Walter W. Reg. No. 25,539  
Oh, Allen J. Reg. No. 42,047  
Padys, Danny J. Reg. No. 35,635  
Parker, J. Kevin Reg. No. 33,024  
Perdok, Monique M. Reg. No. 42,989  
Prout, William F. Reg. No. 33,995  
Sako, Katie E. Reg. No. 32,628  
Schumm, Sherry W. Reg. No. 39,422  
Schwegman, Micheal L. Reg. No. 25,816  
Scott, John C. Reg. No. 45,368  
Smith, Michael G. Reg. No. 38,613  
Speier, Gary J. Reg. No. 45,458  
Steffey, Charles E. Reg. No. 25,179  
Terry, Kathleen R. Reg. No. 31,884  
Tong, Viet V. Reg. No. 45,416  
Viksnins, Ann S. Reg. No. 37,748  
Woessner, Warren D. Reg. No. 30,440

I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization/who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Schwegman, Lundberg, Woessner & Kluth, P.A. to the contrary.


Please direct all correspondence in this case to **Schwegman, Lundberg, Woessner & Kluth, P.A.** at the address indicated below:  
**P.O. Box 2938, Minneapolis, MN 55402**  
**Telephone No. (612)373-6900**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of joint inventor number 1 : **David Erb**  
Citizenship: **United States of America**  
Post Office Address: **3710 E High Lane**  
**Seattle, WA 98112**  
Signature:   
David Erb

Residence: **Seattle, WA**

Date: **11/15/2000**

Full Name of joint inventor number 2 : **Vinod K. Grover**  
Citizenship: **India**  
Post Office Address: **4420 92nd Avenue SE**  
**Mercer Island, WA 98040**  
Signature:   
Vinod K. Grover

Residence: **Mercer Island, WA**

Date: **11/15/2000**

☒ Additional inventors are being named on separately numbered sheets, attached hereto.

Serial No. not assigned

Filing Date: not assigned

Full Name of joint inventor number 3 : Michael A.B. ParkesCitizenship: Great BritainResidence: Cambridge, United KingdomPost Office Address: Beck House,  
80-82 Newmarket Road,  
Cambridge CB5 8DZ  
United KingdomSignature: Michael A.B. ParkesDate: 20<sup>th</sup> Nov 2000Michael A.B. Parkes

§ 1.56 Duty to disclose information material to patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application, and
- (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
  - (i) Opposing an argument of unpatentability relied on by the Office, or
  - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

- (1) Each inventor named in the application;
- (2) Each attorney or agent who prepares or prosecutes the application; and
- (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.